


USE AASHTO M-248, TYPE N,  
 ALKYD-RESIN TYPE (OR  
 APPROVED ALTERNATE). TO A  
 MINIMUM WET FILM THICKNESS  
 OF 15 MILS (0.4MM)

CONCRETE WHEEL STOP  
 WHERE SHOWN ON PLAN

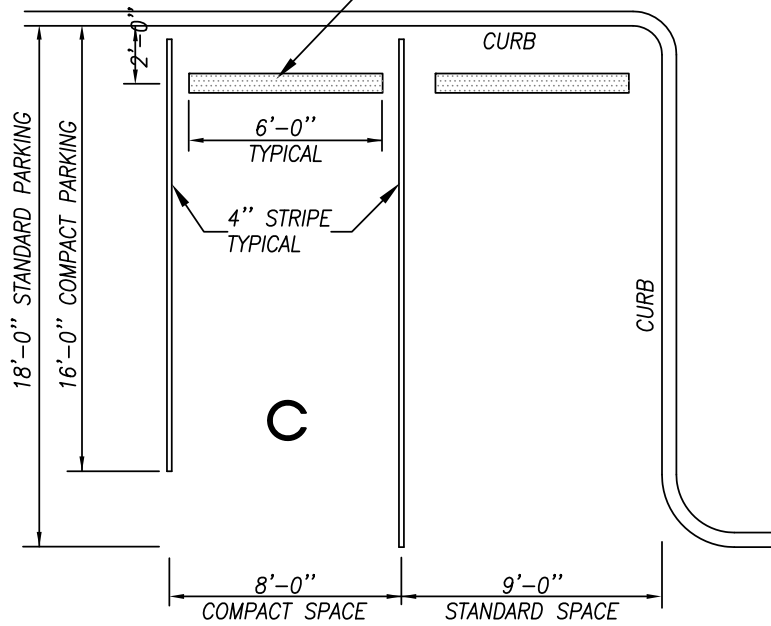

CITY OF COBURG  
 STANDARD DRAWING

STANDARD  
 PARKING STALL



DATE:  
 JANUARY 2017

DRAWING NO.  
 ST-003